



FROM THE MAKER OF #1 QUALITY² ADVANTECH® SUBFLOORING COMES NEW ADVANTECH™ SUBFLOOR ADHESIVE, FOR SUBFLOOR ASSEMBLIES SO STRONG YOU WON'T HEAR A SQUEAK.¹

When it comes to choosing subfloors that install fast and stay flat, builders turn to AdvanTech® panels. With new AdvanTech™ subfloor adhesive, floors not only get a stiff, even base, but a strong, squeak-free panel-to-joist connection when properly installed as part of an AdvanTech™ subflooring assembly¹ in residential applications. With a heavy-duty, polyurethane bond, the gun-applied foam quickly condenses into a high-strength gel subfloor adhesive. Formulated for a powerful bond that exceeds industry performance standards,³ AdvanTech subfloor adhesive even bonds to wet and frozen wood. Use on any wood-to-wood assemblies, glued-floor systems, plywood or OSB. For a Squeak-Free Guarantee™,¹ use with AdvanTech® subfloor panels. See SqueakFreeGuarantee.com for details.

For a finished floor difference you can feel and see, give your homeowners the complete AdvanTech advantage by pairing NEW AdvanTech subfloor adhesive with AdvanTech subfloor panels.

To get started, ask about the AdvanTech™ subfloor adhesive starter kit.

- 6 AdvanTech subfloor adhesive cans
- 1 Polyurethane foam cleaner can
- 1 PTFE Pro Grade Foam applicator gun

Now available in **New England (ME, NH, VT, MA, CT, RI), NY and NC**

Check AdvanTechSFA.com for updated availability, or sign up to be notified when AdvanTech subfloor adhesive is available in your area.

LAUNCHING Q1 2017 NATIONWIDE*

*Excluding Alaska and Hawaii.



One 24 oz. can yields 400 linear feet⁴



Squeak-Free Guarantee¹



Polyurethane bonding strength



Adheres to wet and frozen wood³



Quick and easy application



Apply between 20° to 105° F (-6° to 41° C)



20 minute open time

From the makers of AdvanTech® subfloors – **FLAT OUT BEST™** for strong, moisture-resistant floors. **#1 in quality for over a decade.²**

1. Guarantee only applies to the panel-to-joist connection on assemblies using AdvanTech® panels and AdvanTech™ subfloor adhesive, with I-joists or trusses, and deformed fasteners, for one- or two-family homes. Limitations and restrictions apply. See SqueakFreeGuarantee.com for details.


EXTREME HOLDING POWER, FOR THE FLAT OUT BEST™ ADVANTECH® SUBFLOORS



8X MORE COVERAGE⁴

MORE COVERAGE IN EACH CAN

8x greater yield than traditional adhesive caulks⁴ means advanced strength with less product — a cost-effective, speedy application for your subfloor installations.



IDEAL FOR COLD AND WET CONDITIONS


Formulated to adhere to wet and frozen structural subfloor panels and joists,³ this moisture curing poly adhesive is the ideal solution for not so ideal weather conditions.

EXPANDS INTO
IRREGULARITIES



FILLS GAPS FOR A TIGHTER BOND

The foam to gel polyurethane formula expands into minor gaps between the subflooring panel and joist, maximizing adhesion for a tighter overall subflooring assembly.

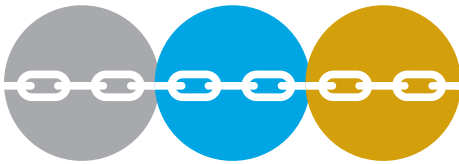

POLYURETHANE BONDING STRENGTH

Polyurethane formula helps create a solid, firmly-bonded surface — exceeding ASTM D3498 and APA-AFG-01 subfloor adhesive standards. Floors stay put, and quiet, helping reduce the chance of callbacks. When tested to ASTM requirements, AdvanTech™ subfloor adhesive consistently performs 2 to 5 times above standards.

Versatile Application Strength	
ASTM D3498	Pass Criteria
Shear Strength — Dry Lumber	> 500 psi (requirement >150)
Shear Strength — Wet Lumber	> 300 psi — Douglas Fir (req > 150) > 400 psi — Southern Pine (req > 150)
Shear Strength — Frozen Lumber	> 300 psi — Douglas Fir (req > 100) > 500 psi — Southern Pine (req > 100)
Moisture Resistance	> 500 psi (req > 150)
Gap	> 400 psi (req > 100)
Oxidation Resistance	Pass

Technical Data	
Shelf Life	18 months
Open Time	20 minutes
Fully Cured	24 hours
Yield at 1/2" bead size ⁴	400 linear feet
Appl. Temperature Range	20° – 105°F
VOC Content	≤ 15 wt. %
VOC Content (California)	≤ 155 g/L
VOC Compliant ⁵	Yes

1. Guarantee only applies to the panel-to-joist connection on assemblies using AdvanTech® panels and AdvanTech™ subfloor adhesive, with I-joists or trusses, and deformed fasteners, for one- or two-family homes. Limitations and restrictions apply. See SqueakFreeGuarantee.com for details.
2. Builder Magazine 2002-2016 Brand Use Studies; #1 in OSB category.
3. Exceeds ASTM D3498 Standard Specification for Field-Gluing Plywood to Lumber Framing for Floor Systems, dry, wet, frozen, and gap filling adhesion tests.
4. Coverage: One 24 oz. can of AdvanTech subfloor adhesive yields approximately 400 linear feet of gel adhesive at 1/2" bead compared to applying a 28 oz. cartridge adhesive at 3/8" bead. Coverage will vary based on bead size and weather conditions.
5. California Air Research Board, CARB, has classified AdvanTech Subfloor Adhesive as a Web Spray Adhesive. AdvanTech Subfloor Adhesive satisfies governing VOC limitations for web spray adhesives.



Watch the easy application in action and see the heavy-duty holding power difference.
Visit AdvanTechSFA.com