

# Premium Log Cabin Siding



**Premium Log Cabin Siding Smooth Round**, is a thick panel siding that mimics the look of old-world log cabin siding. It installs with a shiplap connection that is easy to install and is cost-effective. It is an excellent option for country cottages, cabins, pool houses, and more. It is a premium grade that can be either stained or painted.


## Available Size:


| Item                       | SKU     | Lengths   | Exposure | Coverage      | Species |
|----------------------------|---------|-----------|----------|---------------|---------|
| 2x8 Smooth Round Log Cabin | 28_LCS  | 12' & 16' | 6-5/8"   | 181 LF/Square | SPF     |
| 2x8 Hand Hewn Log Cabin    | 28_HHLC | 16'       | 6-5/8"   | 181 LF/Square | SPF     |

- Smooth Round is a uniform machine profile cut  
 - Hand Hewn looks like someone cut the wood with an ax. (It leaves a more rustic and irregular appearance that more closely replicates historical log cabin homes.)

## Profile & Coverage:

181 Lineal Feet = 100 Square Feet

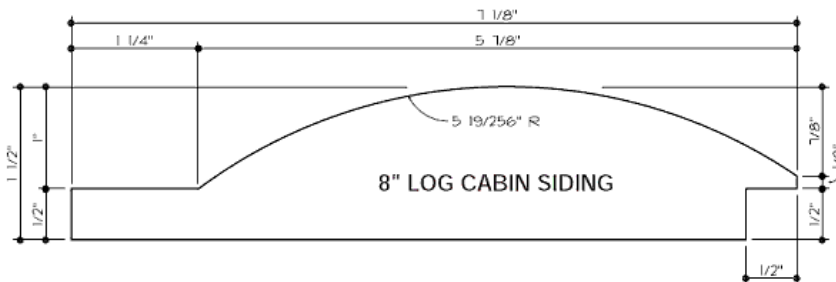

|  |                          |
|--|--------------------------|
| <br>PRODUCT  | Premium Log Cabin Siding |
| <br>SPECIES | SPF White Wood           |
| <br>USAGE   | Siding                   |



# Premium Log Cabin Siding



## Installation:

First, make sure the material acclimates for at least a week in its end environment. Acclimation is a critical step for proper installation and prevents future expansion, contraction, or warping issues from occurring. There are two ways you can install. You can install with two nails through the face at every stud for best long-term performance, or, if you choose, you can blind nail through the tongue. For trim, make sure to use at least a 2" trim to leave a proper shadow line.




- Premium Hand Hewn



### LOG CABIN

Log Cabin siding is 1½" thick at the thickest point. Ideally suited to informal buildings in rustic settings. The pattern may be milled from appearance grades (Commons) or dimension grades (2x material). Allows for ½" overlap, including an approximate ⅛" gap. Do not nail through overlapping pieces. Horizontal or vertical applications.



Use two siding or box nails, 3-4" apart, per bearing to face nail.

Scan QR Code to Learn More:

